




TECHNICAL DATA

COLLATED COARSE THREAD DRYWALL SCREW

For attaching gypsum board to wood studs.

PRODUCT SPECIFICATIONS

Part #	Length
CS114C1M	1-1/4 in.
CS114PGPC1M	1-1/4 in.
CS158C1M	1-5/8 in.
CS158C4M	1-5/8 in.
CS158PGPC1M	1-5/8 in.
CS200C1M	2 in.
CS200C4M	2 in.
CS212C1M	2-1/2 in.
CS212PGPC1M	2-1/2 in.
CS6200C1M	2 in.
CS6200C4M	2 in.
CS6200PGPC1M	2 in.
GS114C1M	1-1/4 in.

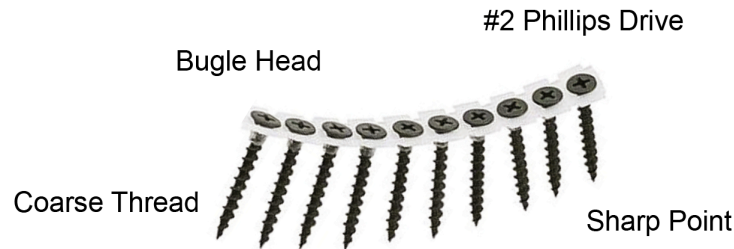

	Size	4M	1M
Black Phosphate	6 x 1-1/4"	CS114C4M	CS114C1M
	6 x 1-5/8"	CS158C4M	CS158C1M
	6 x 2"	CS6200C4M	CS6200C1M
	7 x 2"	-	CS200C1M
	8 x 2-1/2"	CS212C4M	CS212C1M
PrimeGuard Plus	6 x 1-1/4"	CS114PGPC4M	CS114PGPC1M
	6 x 1-5/8"	CS158PGPC4M	CS158PGPC1M
	6 x 2"	CS6200C4M	CS6200PGPC1M
	8 x 2-1/2"	-	CS212PGPC1M
Brown	9 x 2-1/2"	-	CS212PBC1M
Gray	9 x 2-1/2"	-	CS212PGC1M
Red	9 x 2-1/2"	-	CS212PRC1M
Zinc	6 x 1-1/4"	-	GS114C1M
	6 x 1-5/8"	-	GS158C1M

<ul style="list-style-type: none">• Bugle Head• #2 Phillips Recess Drive• Sharp Point• Coarse Thread	<ul style="list-style-type: none">• Available in PrimeGuard Plus exterior coating, Black Phosphate, or Zinc• PrimeGuard Plus fasteners feature a proprietary coating with a lifetime guarantee against rust, including when used with treated lumber.	<ul style="list-style-type: none">• Designed for use with tools from: Grabber, Hitachi, Milwaukee, Pam, Senco, Tyrex, and others.• Made to conform to ASTM C1002
---	--	---

ALL PRIMESOURCE® FASTENERS ARE MANUFACTURED IN AN ISO 9001 CERTIFIED AND APPROVED FACTORY TO PRIMESOURCE® PERFORMANCE SPECIFICATIONS AND PRINT DRAWINGS.