
TECHNICAL DATA

COLLATED COARSE THREAD DRYWALL SCREW

For attaching gypsum board to wood studs.

PRODUCT SPECIFICATIONS

Part #	Length
CS114C1M	1-1/4 in.
CS114PGPC1M	1-1/4 in.
CS158C1M	1-5/8 in.
CS158C4M	1-5/8 in.
CS158PGPC1M	1-5/8 in.
CS200C1M	2 in.
CS200C4M	2 in.
CS212C1M	2-1/2 in.
CS212PGPC1M	2-1/2 in.
CS6200C1M	2 in.
CS6200C4M	2 in.
CS6200PGPC1M	2 in.
GS114C1M	1-1/4 in.

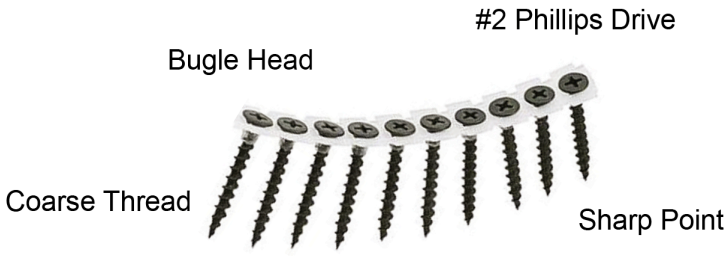

	Size	4M	1M
Black Phosphate	6 x 1-1/4″	CS114C4M	CS114C1M
	6 x 1-5/83″	CS158C4M	CS158C1M
	6 x 2″	CS6200C4M	CS6200C1M
	7 x 2″	–	CS200C1M
	8 x 2-1/2″	CS212C4M	CS212C1M
PrimeGuard Plus	6 x 1-1/4″	CS114PGPC4M	CS114PGPC1M
	6 x 1-5/8″	CS158PGPC4M	CS158PGPC1M
	6 x 2″	CS6200C4M	CS6200PGPC1M
	8 x 2-1/2″	–	CS212PGPC1M
Brown	9 x 2-1/2″	–	CS212PBC1M
Gray	9 x 2-1/2″	–	CS212PGC1M
Red	9 x 2-1/2″	–	CS212PRC1M
Zinc	6 x 1-1/4″	–	GS114C1M
	6 x 1-5/8″	–	GS158C1M

• Bugle Head • #2 Phillips Recess Drive • Sharp Point • Coarse Thread	• Available in PrimeGuard Plus exterior coating, Black Phosphate, or Zinc • PrimeGuard Plus fasteners feature a proprietary coating with a lifetime guarantee against rust, including when used with treated lumber.	• Designed for use with tools from: Grabber, Hitachi, Milwaukee, Pam, Senco, Tyrex, and others. • Made to conform to ASTM C1002

ALL PRIMESOURCE® FASTENERS ARE MANUFACTURED IN AN ISO 9001 CERTIFIED AND APPROVED FACTORY TO PRIMESOURCE® PERFORMANCE SPECIFICATIONS AND PRINT DRAWINGS.

© 2025 PrimeSource® Building Products, Inc